

**The Seakeeper 6** packs a punch. Designed to eliminate up to 95% of boat roll on boats up to ~20 tons, vessels ~40 - 49', the Seakeeper 6 provides tons of stabilizing power in a compact, energy efficient package. This new model also includes an updated electronics suite, including an all new touch screen display with NMEA and Ethernet capabilities.




## TECH SPECS


<b>Rated Speed</b>	9,700 RPM
<b>Angular Momentum at Rated RPM</b>	6,000 N-M-S
<b>Anti-Rolling Torque at Rated RPM</b>	15,690 N-M
<b>Spool-up Time to Rated RPM</b>	40 minutes (9,700 RPM)
<b>Spool-up Time to Stabilization</b>	24 minutes (7,700 RPM)
<b>Spool-up Power</b>	
AC Motor	2300 Watts
DC Control	125 Watts
<b>Operating Power</b>	
AC Motor (sea state dependent)	1050 - 2300 Watts
DC Control	125 Watts
AC Input Voltage	110 - 230 VAC (+/- 10%), 50/60 Hz, Single Phase
DC Input Voltage	12 VDC @ 15 Amps
<b>Sea Water Supply to Heat Exchanger</b>	30 LPM (8 GPM) maximum 15 LPM (4 GPM) minimum
<b>Ambient Air Temperature</b>	0° - 60° C (32° - 140° F)
<b>Weight</b>	395 kg (870 lbs)
<b>Envelope Dimensions</b>	Length x Width x Height 0.756 L x 0.755 W x 0.626 H (meters) 29.77 L x 29.71 W x 24.65 H (inches)
<b>Noise Output</b>	At full operating RPM, steady state noise measured in the factory at a 1 meter distance measures 70 - 72 dBC. (Sound levels may be higher during spool-up)

\* Preliminary - Subject to Change

## PORT VIEW

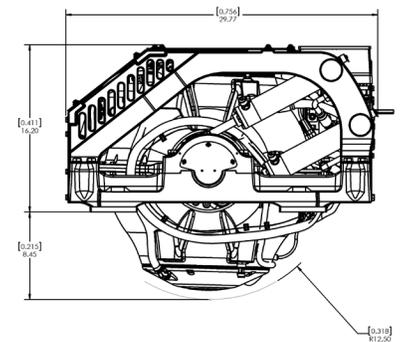

## FRONT VIEW

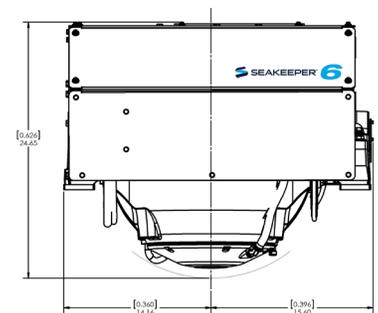

## TOP VIEW

